LED DRIVER Programmable 40W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.40A to 1.4A Max 40W

Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%**. Output Range of 15V to 55V for Single circuit 40W maximum.

Technical Specification:

Class 2 UL, CUL Certified, ROHS Compliant EMI FCC Parts 18, Subparts C, Class A

Rating: IP 30 Damp

Output Open/Short Protection

Min. Starting Temp: 0° C Max. Case Temp: 90° C Typical Efficiency 90%

DIM to OFF at 1.4A Optional



Input Voltage range: $\pm 10\%$ Output Load range $\pm 5\%$ Input Frequency: $\pm 50/60$ HZ
THD: $\pm 20\%$ Power Factor Min: 0.90

Remote Wiring Distance Full Load: 18AWG -18 ft

Terminal Blocks


Case Size: Series E13

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120	0.40A	47	40	15 – 55V	0.4 - 1.4A	PU1400C40WSDE13
277	0.18A					

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

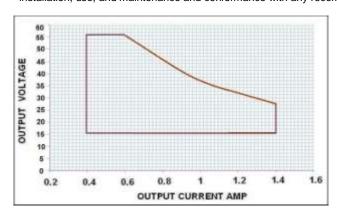

0-10V Dimmer

 Compatibility Chart

 LEVITON
 LUTRON


 DS710-10Z
 NFTV

 DVTV-WH

L W H ML
Series E13 314mm 34mm 27.5mm 301mm
Case Size: 12.36inch 1.34inch 1.08inch 11.85inch

WARNING: Always Disconnect Power Before Handling.

Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.

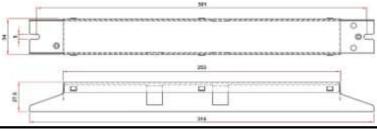

AC INPUT OUTPUT GRAY DIM-LINE PURPLE DIM + NEUTRAL BLUE LED-LED DRIVER RED LED + BLUE LED-RED LED+ Both Positive & Negative Output Connectors are equal - similar electrical position Place the Programmable wand above the NFC Mark on the LED Driver to start programming

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

