347V LED DRIVER Programmable 50W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.40A to 1.4A Max 5**0W**

Class 2 Small Case Size - Bottom Mount Studs with leads No Mounting Flange

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **1-100%.** Output Range of 15V to 55V for Single circuit 50W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant

EMI FCC Parts 18, Subparts C, Class A

Rating: **TL** IP 64 Damp Output Open/Short Protection Min. Starting Temp: 0° C

Max. Case Temp: 90° C

Typical Efficiency 90%

Input Voltage range: \pm 10%
Output Load range \pm 5%
Input Frequency: 50/60HZ
THD: < 20%

Power Factor Min: 0.90

Remote Wiring Distance Full Load: 18AWG -18 ft

2/1/17

Bottom Mount Studs


Case Size: Series C1B

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

| INPUT VOLTAGE | INPUT CURRENT | INPUT WATTS | OUTPUT POWER WATTS MAX | OUTPUT VOLTAGE | OUTPUT CURRENT AMPS | MODEL |
|------------------|------------------|----------------|------------------------------|-------------------|---------------------------|-----------------|
| 347 | 0.17A | 59 | 50 | 15 - 55 | 0.4 - 1.4 | PC1400C50WSB-D1 |

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

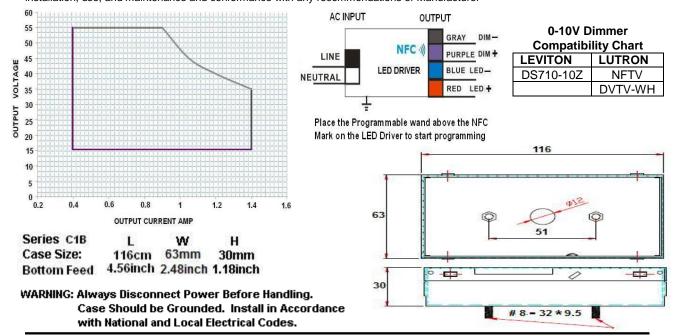

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

