LED DRIVER Programmable 40W 0-10V Dimming

1-100% Output Range 15V to 55V Current 0.40A to 1.4A Max **40W**

Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic Programmable (NFC) LED Driver 0-10V Dimming 1-100%. Output Range of 15V to 55V for Single circuit 40W maximum.

Technical Specification:

Class 2 UL, CUL Recognized, ROHS Compliant FCC Parts 18, Subparts C, Class A

IP 30 Damp Rating: TL

Output Open/Short Protection Min. Starting Temp:

Max. Case Temp: 90° C

88% Typical Efficiency

Input Voltage range: + 10% **+** 5% Output Load range 50/60HZ Input Frequency: THD: < 20% Power Factor Min: 0.90


Remote Wiring Distance Full Load: 18AWG -18 ft

Terminal Blocks

Case Size: Series E13

L	Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 3/3/18							
	INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL	
	120	0.40A	47	40	15 - 55V	0.4 - 1.4A	PU1400C40WSD1-E13	
	277	0 18A						


5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer



0-10V Dimmer Compatibility Chart				
LEVITON	LUTRON			
DS710-10Z	NFTV			
	DVTV-WH			

W Series E13 314mm 34mm 27.5mm 301mm Case Size: 12.36inch 1.34inch 1.08inch 11.85inch

WARNING: Always Disconnect Power Before Handling. Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

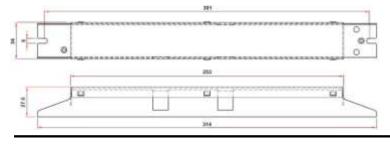

AC INPUT OUTPUT GRAY DIM-LINE PURPLE DIM + NEUTRAL BLUE LED-GROUND LED DRIVER RED BLUE LED-RED LED+ Both Positive & Negative Output Connectors are equal - similar electrical position Place the Programmable wand above the NFC Mark on the LED Driver to start programming

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

