## 347V LED DRIVER Programmable 98W 0-10V Dimming

**5-100%** Output Range 27V to 55V Current 1.4A to 2.75A Max **98W** 

Class 2 Low Profile Slim Case Size with Terminal Blocks

347V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming **5-100%.** Output Range of 15V to 55V for Single circuit 98W maximum.

## **Technical Specification:**

Class 2 UL, CUL Certified, ROHS Compliant EMI FCC Parts 18, Subparts C, Class A Rating: Class P IP 30 Damp, Dry

Output Open/Short Protection

Min. Starting Temp: 0° C Max. Case Temp: 90° C

Typical Efficiency 90%

Input Voltage range:  $\pm$  10%
Output Load range  $\pm$  5%
Input Frequency: 50/60HZ
THD: < 20%
Power Factor Min: 0.90

Remote Wiring Distance Full Load: 18AWG -18 ft

**Terminal Blocks** 


Case Size: Series E14

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
347	0.32	110	98	27 – 55V	1.4 - 2.75	PC2750C98WSD

## LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

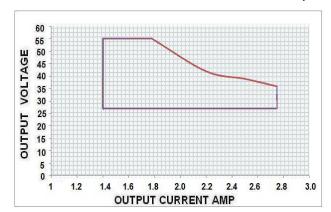


## 0-10V Dimmer Compatibility Chart LEVITON LUTRON DS710-10Z NFTV DVTV-WH DVTV-WH

Series E 14 L W H ML
Case Size: 395mm 38 mm 27.5 mm 387mm
15.5inch 1.49inct 1.08inch 15.2inch

WARNING: Always Disconnect Power Before Handling.

Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.

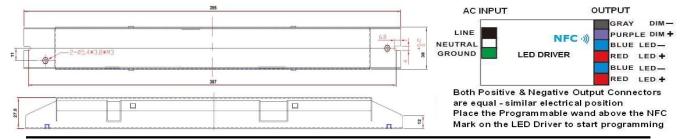

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

