## **LED DRIVER Programmable 30W 0-10V Dimming**

Output Range 15V to 55V Current 0.35A to 1.25A Max 30W Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic **Programmable (NFC)** LED Driver 0-10V Dimming. Output Range of 15V to 55V for Single circuit 30W maximum.

## **Technical Specification:**

Class 2 UL, CUL Recognized, ROHS Compliant

EMI FCC Parts 18, Subparts C, Class A Rating: TL IP 30 Damp, Dry

Output Open/Short Protection
Min. Starting Temp: - 40° C

Max. Case Temp: 90° C

Typical Efficiency 82%

Input Voltage range: $\pm$  10%Output Load range $\pm$  5%Input Frequency:50/60HZTHD:< 20%

Remote Wiring Distance Full Load: 18AWG -18 ft

2/9/16

Terminal Blocks

Power Factor Min:

Case Size: Series E13


0.90


Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
120-277	0.3 - 0.13A	37	30	15 - 55V	0.35 - 1.25	PU1250C30WSDIM-E13

## LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

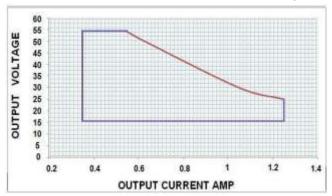




L W H ML
Series E13 314 mm 33 mm 28 mm 300 mm
Case Size: 12.36 inch 1.29 inch 1.1 inch 11.81 inch

WARNING: Always Disconnect Power Before Handling.

Case Should be Grounded. Install in Accordance
with National and Local Electrical Codes.

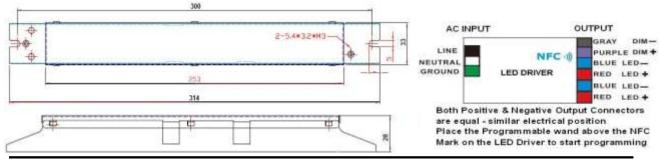

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

