## **LED DRIVER Programmable 98W 0-10V Dimming**

Output Range of 27V to 55V Current 1.4A to 2.75A Max 98W Class 2 Low Profile Slim Case Size with Terminal Blocks

Universal Voltage 120-277V Electronic Programmable (NFC) LED Driver 0-10V Dimming. Output Range of 15V to 55V for Single circuit 98W maximum

## **Technical Specification:**

Class 2 UL, CUL Recognized, ROHS Compliant

FCC Parts 18, Subparts C, Class A

Rating: TL IP 30 Damp Output Open/Short Protection Min. Starting Temp: - 40° C Max. Case Temp: 90° C

Typical Efficiency 85%

+ 10% Input Voltage range: Output Load range + 5% Input Frequency: 50/60HZ THD: < 20% Power Factor Min: 0.90

Remote Wiring Distance Full Load: 18AWG -18 ft


Terminal Blocks

Case Size: Series E14

Due to continuing efforts to offer improved products all specifications are subject to change without prior notice 3/3/18							
	INPUT VOLTAGE	INPUT CURRENT	INPUT WATTS	OUTPUT POWER WATTS MAX	OUTPUT VOLTAGE	OUTPUT CURRENT AMPS	MODEL
	120	0.93	113	98	27 - 55V	1.4 - 2.75	PU2750C98WSDIM
	277	0.4					

## LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Product will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer

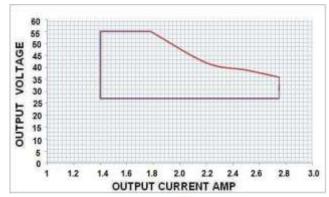


## 0-10V Dimmer **Compatibility Chart LEVITON** LUTRON DS710-10Z NFTV

Series E 14 L Case Size: 395mm 38 mm 27.5 mm 387mm 15.5inch 1.49incl 1.08inch 15.2inch

WARNING: Always Disconnect Power Before Handling. Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

DVTV-WH

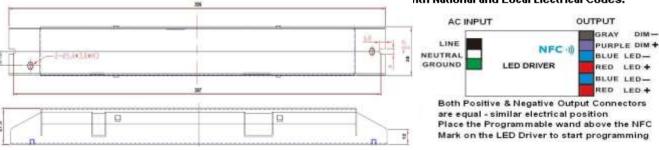

1500 Marine Drive, #200 North Vancouver, BC V7P 1T7

TEL: 604-904-9533 FAX: 604-904-9634

EMAIL: sagelighting@shaw.ca www.sagelighting.com

